


SPECIFICATION KOZ CABLE BLOCK UNI TRI 3x3 27-37

Application:	Suitable for mounting single- and multiple-conductor low- medium and high voltage cables alongside or in layers upon each other.
Range:	For cables with a nominal outer diameter of 27 up to 37 mm.
Material:	Black polyamide (PA66), fibreglass-reinforced, virgin material.
Fire resistance:	UL94 V-0 and classification standard EN 45545-2: 2020 – Railway applications. Requirement set R22,R23 / Hazard level HL1,HL2.
Standards:	Certified in accordance with the international standard NEN-EN-IEC 61914:2021.
Temperature:	Permanent application from -80°C to +120°C. Short-term heating of up to +220°C.
Advantages:	Resistant to oils, greases, frost, heat, UV, ozone, salt water, salts, acids and aggressive chemicals. Non-oxidizing, non-corrosive, non-magnetic and non-conductive. Halogen-free and no sharp edges. Lifetime warranty, easy assembly and available worldwide.
Extra possibilities:	The KOZ UNI TRI 3x 27-37 cable blocks are designed in such a way that these blocks can hold 9 cables, 3x 3 cables in Trefoil formation. This will give you extra possibilities when multiple cables have to be installed in limited spacing.

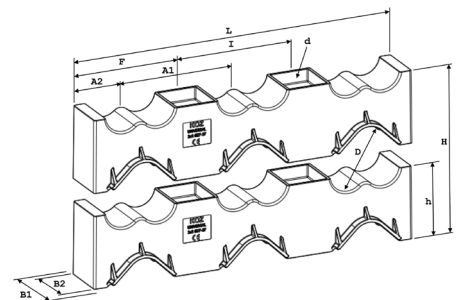

Initial torque for fastening fixing material : 5 – 8 Nm.
(depends on cable manufacturer's prescription).

Tests have been performed by KEMA, SGS, KU Leuven, UL and Schneider.

The product listed in this datasheet is produced in conformity with the latest EU Directive 2011/65 / EU (RoHS), and complies with all legal obligations in accordance with REACH.

DIMENSIONS IN MILLIMETERS

Type	DØ	L	I	F	A1	A2	B1	B2	dØ	h	H	Strength (N)
KOZ UNI TRI 3x3 27-37	27-37	340	119-130	105-110	120	50	66	50	13	75	152-176	36.900