



# SPECIFICATION KOZ CABLE CLAMP SFHC 18-23

<b>Range:</b>	For cables with a nominal outer diameter of 18 up to 23 mm.
<b>Material:</b>	Black polyamide (PA66), fibreglass-reinforced, virgin material.
<b>Fire resistance:</b>	UL94 V-0 and classification standard EN 45545-2: 2020 – Railway applications. Requirement set R22,R23 / Hazard level HL1,HL2.
<b>Standards:</b>	Certified in accordance with the international standard NEN-EN-IEC 61914:2021.
<b>Temperature:</b>	Permanent application from -80°C to +85°C.
<b>Advantages:</b>	Resistant to oils, greases, frost, heat, UV, ozone, salt water, salts, acids and aggressive chemicals. Non-oxidizing, non-corrosive, non-magnetic and non-conductive. Halogen-free and no sharp edges. Lifetime warranty, easy assembly and available worldwide.
<b>Extra possibilities:</b>	The SFHC cleat is designed for an easy installation of small cables, such as a grounding cable, with our KOZ® cable clamps and blocks.

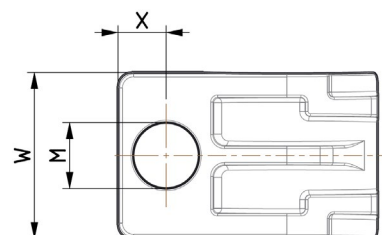

Initial torque for fastening fixing material : 5 – 8 Nm.  
(depends on cable manufacturer's prescription).

Tests have been performed by KEMA, SGS, KU Leuven, UL and Schneider.

The product listed in this datasheet is produced in conformity with the latest EU Directive 2011/65 / EU (RoHS), and complies with all legal obligations in accordance with REACH.

## DIMENSIONS IN MILLIMETERS

Type	DØ	M	L	H min.	H max.	W	X
KOZ SFHC 18-23-08	18-23	M8	45	33	38	36	10
KOZ SFHC 18-23-10	18-23	M10	45	33	38	36	10
KOZ SFHC 18-23-12	18-23	M12	45	33	38	36	10
KOZ SFHC 18-23-14	18-23	M14	45	33	38	36	10